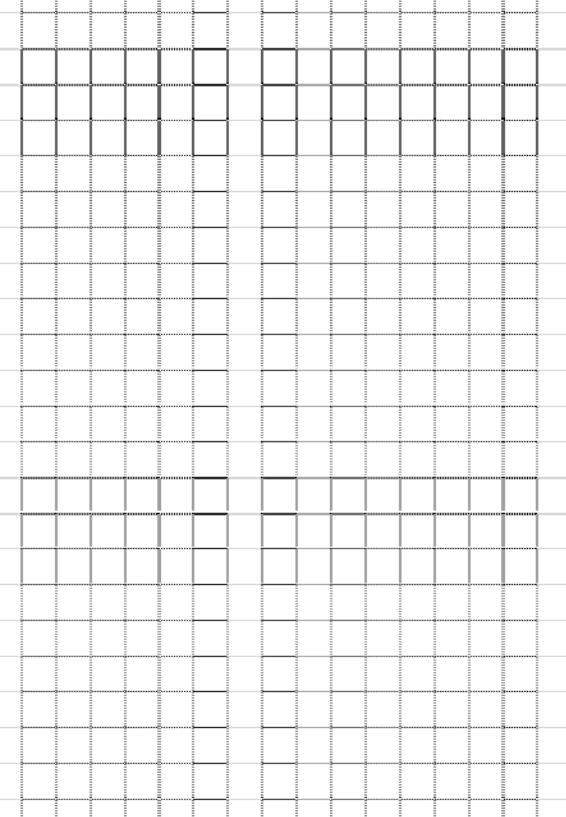
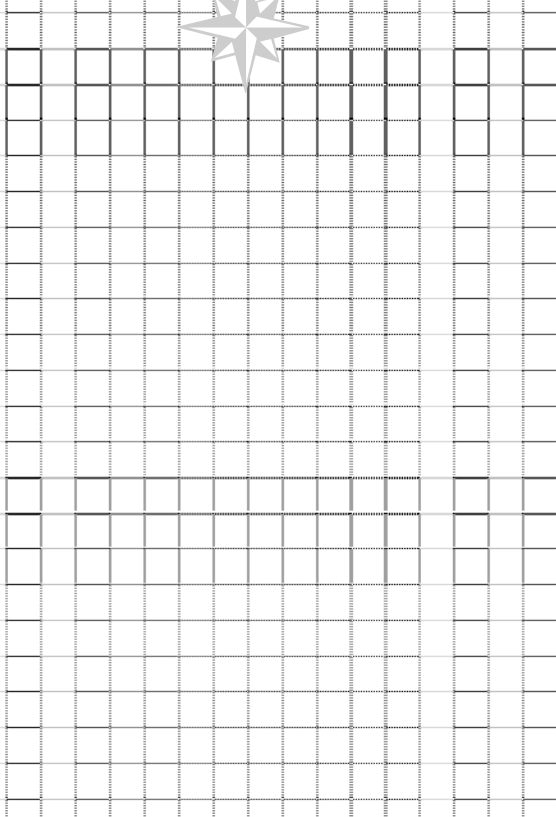


To: The Director of Municipal Services

Name:	
Address:	
Describe reasons for extending or adding new approach: Include approximate depth of ditch.	

Policy 310 and Drawing 310-05 apply.

Legal	
Lot, Block & Plan	

20. Block & Plan		21. Section	
Show directions		Sketch of proposed access	
			



Lethbridge County Policy Handbook

EFFECTIVE: March 16, 1988

SECTION: 300 NO. 310

APPROVED BY: County Council

SUBJECT: Approach Construction Guidelines

REVISED DATE: March 24, 2005

1. Approaches will be constructed with a minimum 6 metre finished driving surface.
2. Culvert specifications:
 - a) 500 mm (20 in) - minimum diameter for most rural sites
 - b) Hamlet & grouped residential - culvert diameter to be determined by County staff
 - c) Areas containing storm management systems (drainage) - culvert diameter to be determined by County staff
 - d) Corrugated Steel Pipe (CSP); new material only
3. On new requests for approaches, only one per half mile will be allowed, excepting home quarters and quarters with physical severances, which will be allowed two per half mile at no cost to the County. (This policy does not apply to newly created subdivision wherein a Developer's Agreement is required)
4. On requests for widening existing approaches, the land owner will supply all materials and installation to complete the widening.
5. Where land owners desire to install their own approaches or extension, said approach will be allowed at the discretion of the Public Works Department and must be installed to specifications as determined by the Director of Municipal Services.
6. Generally, approaches will be constructed as follows: (SEE DRAWING #: 310-05A).


Approvals and inspection fees shall be charged in accordance with Lethbridge County Schedule of Fees By-Law. A refundable charge of \$100.00 will be reimbursed to the applicant, once inspection is conducted.

For new approaches forward letter and sketch, including the legal land description, to:


Director of Municipal Services
#100 - 905 4th Avenue South
Lethbridge, AB T1J 4E4

Phone: (403) 328-5525
Fax: (403) 328-5602

PLAN VIEW

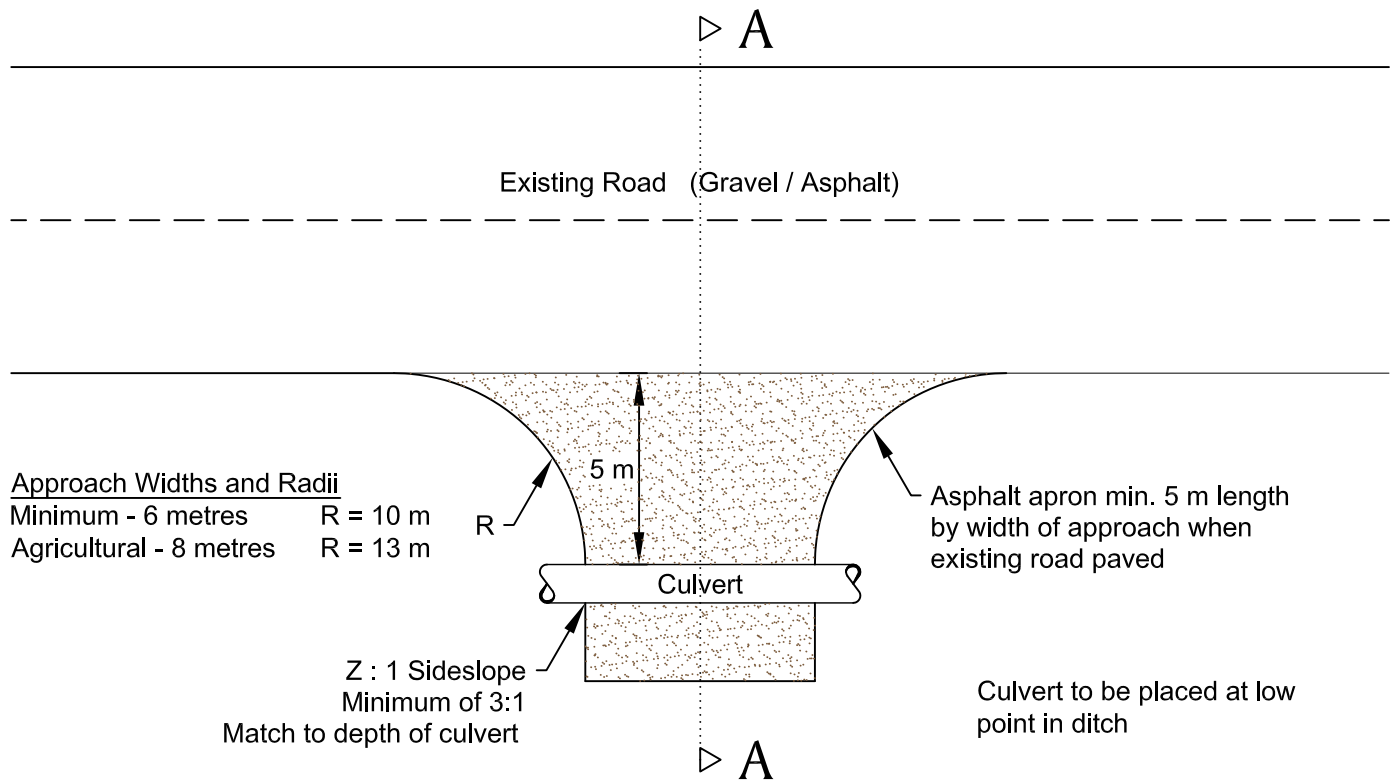

CROSS SECTION AA

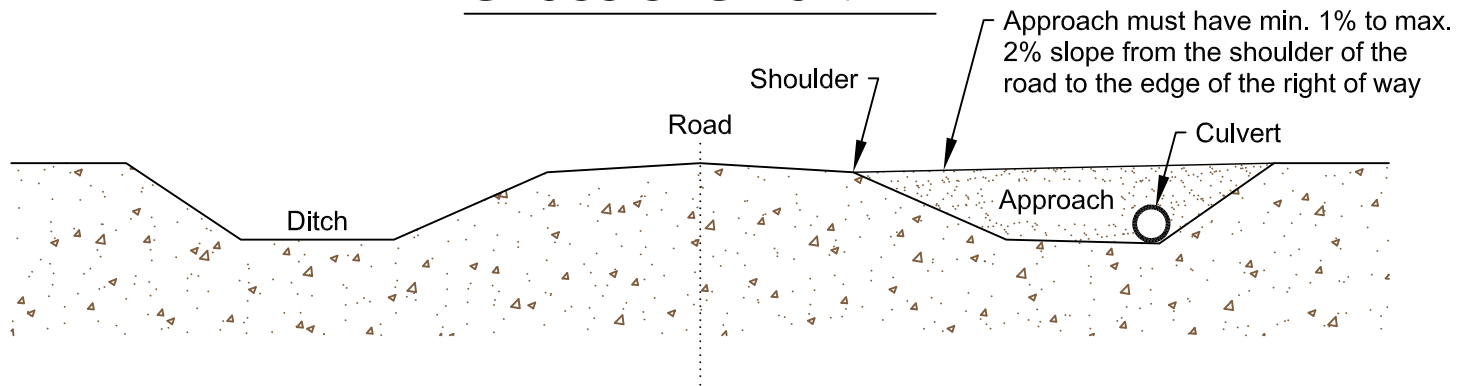

Asphalt Apron:
Min. 80 mm depth, acceptable quality
Asphalt placed on min. 150 mm
compacted granular base course (25 mm)

All approaches must be
gravelled with crushed material
unless otherwise specified